

TECHNICAL SPECIFICATION

Auxiliary contact block TM2 AE11- side mounting




Description

It is designed to switch on operational systems or signalization. Designed with one NO and one NC contact. It changes the position of its contacts according to the position of the breaker (switched on/off) to which it is mounted.

Technical data

- Plastic: wear resistance of UV rays and non-flammable (self-extinguishing material)
- Ambient temperature: -10°C + 65°C
- Altitude: up to 2000m
- Mounting:
 - laterally to a breaker TM2-Exx

Dimensions

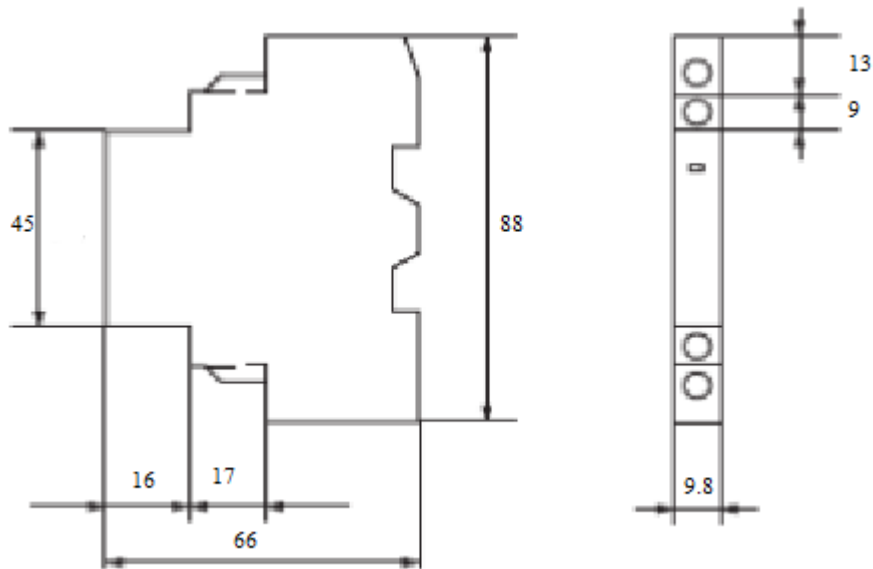

Variants:

Type	Catalogue number
TM2 AN11	48911
TM3 AN11	48913

Standards: EN 60947-1:2007

EN 60947-5-1:2004

