

EL[®]MARK

The Brand of Electricity

GRF LED RECESSED FIXTURES



TECHNICAL SPECIFICATION

LED GARDEN

ELMARK[®]

The Brand of Electricity

Technical data:

- Rated voltage: 230V / 50-60Hz
- Power: 1.5W; 3.5W
- LED driver: mounted in the body
- Light source: SMD2835
- Colour temperature: 6000-6500K
- Colour rendering index: Ra≥80
- Switch on/off > 15 000
- Average Lifetime: 30 000h
- Operating temperature: -20° ÷ + 65°C
- Light angle: 30°
- Body: Stainless steel +Aluminium
- Installation: Wall recessed outdoor mounting
- Cable: 3G0.75mm²-10cm
- Protection against dust and moisture: IP65
- Surface requirements: Class F

*** Each of the models comes with additional decorative grid**



Features:

- Wide distribution of even and stable light
- Economic- low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body

TECHNICAL SPECIFICATION

LED GARDEN


ELMARK[®]

The Brand of Electricity

Area of application:

- Suitable for outdoor use
- Gardens
- Parks
- Places with high level of moisture

Variants and Dimensions:

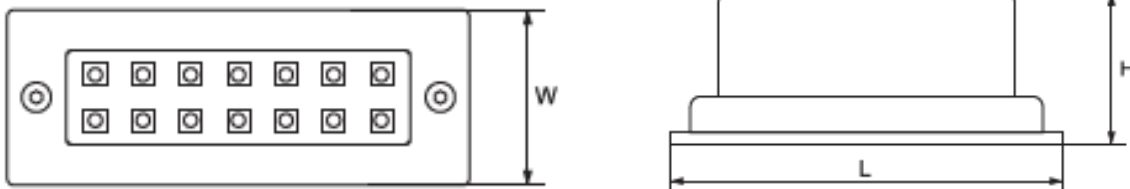

Watt	Whole fixture lumens	Colour temp.	Light angle	Size (mm)			Catalogue number
				Length	Width	Height	
1,5	55/32	6000-6500	30°	125	53	61	96GRFLED0031
1,5	75/42	6000-6500	30°	80	80	61	96GRFLED0091
3,5	187/165	6000-6500	30°	205	95	65	96GRFLED0041
3,5	136/125	6000-6500	30°	135	135	65	96GRFLED0061

TECHNICAL SPECIFICATION


LED GARDEN

ELMARK[®]

The Brand of Electricity

Barcodes:

96GRFLED0031	3800131176097
96GRFLED0091	3800131176127
96GRFLED0041	3800131176103
96GRFLED0061	3800131176110

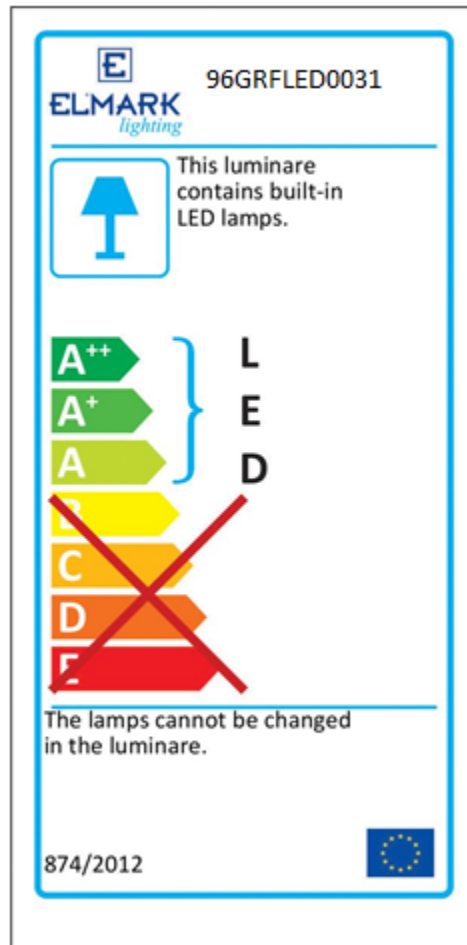

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 13032-4



www.elmarkholding.eu